

## Embedded Solutions



### CFast Cards

## CFX600I

Featuring a SATA III interface, Transcend's CFast 2.0 CFX600I memory cards boast high data transfer rates and large storage capacity. The CFX600I cards have a wide operating temperature, allowing sustained functionality and reliability in extreme temperatures, and can also be used as bootable disks.

### Hardware Features

- Compliant with RoHS standards
- Compliant with CFast specification 2.0
- MLC NAND flash
- Durability: 10,000 insertion/removal cycles

### Firmware Features

- Built-in ECC (Error Correction Code) functionality
- Enhanced S.M.A.R.T. function for durability
- Security Command
- Power-saving DevSleep (Device Sleep) mode
- Wear-Leveling

### Ordering Information

---


16GB TS16GCFX600I

---

## Specifications

<b>Appearance</b>	Dimensions	42.8 mm x 36.4 mm x 3.3 mm (1.69" x 1.43" x 0.13")
	Form Factor	Compact flash card
<b>Interface</b>	Bus Interface	SATA III 6Gb/s
<b>Storage</b>	Flash Type	MLC NAND flash
	Capacity	16 GB
<b>Operating Environment</b>	Operating Voltage	3.3V±5%
	Operating Temperature	-40°C (-40°F) ~ 85°C (185°F)
	Storage Temperature	-40°C (-40°F) ~ 85°C (185°F)
	Humidity	0% ~ 95%
	Shock	Acceleration: 490 m/s <sup>2</sup> (standard holding time: 11 ms, semi-sine wave, velocity change: 3.44 m/s)
	Vibration (Operating)	3 G (peak-to-peak), 5 Hz ~ 800 Hz (frequency)
<b>Power</b>	Power Consumption (Max.)	0.53 watt(s)
<b>Performance</b>	Read Speed (Max.)	up to 139 MB/s
	Write Speed (Max.)	up to 28 MB/s
	Mean Time Between Failures (MTBF)	1,000,000 hour(s)
<b>Warranty</b>	Warranty	Three-year Limited Warranty

## Mechanical Dimensions

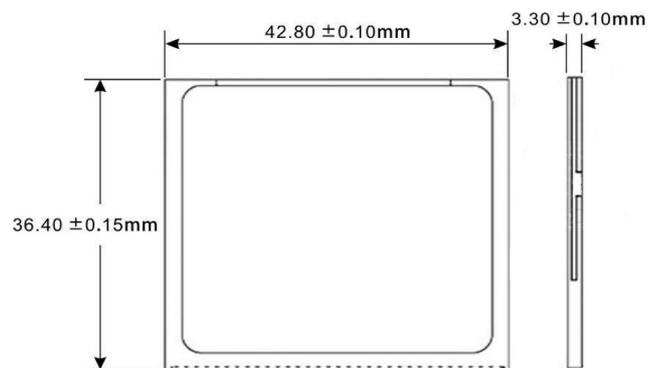

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.