

Embedded Solutions



SATA III M.2 SSDs

MTS952T2

Transcend's MTS952T2 M.2 SSD features the SATA III 6Gb/s interface, delivering superior transfer speeds. The MTS952T2 features the latest 3D NAND technology for high storage efficiency, 30 μ m PCB gold finger and Corner Bond technology for enhanced durability, built-in DRAM cache for fast access, an extended operating temperature range from -20°C to 75°C, and an endurance rating of 3K Program/Erase cycles for reliable operation.

Hardware Features

- DDR3 DRAM Cache embedded
- 30 μ m PCB gold finger
- Endurance: 3K P/E cycles (Program/Erase cycles) guaranteed
- Key components fortified by default with Corner Bond technology
- Supports Transcend Scope Pro software

Firmware Features

- Dynamic thermal throttling
- Advanced Global Wear-Leveling and Block management for reliability
- Built-in LDPC ECC (Error Correction Code) functionality
- Supports S.M.A.R.T. function to conduct health monitoring, analysis, and reporting for storage devices
- Power-saving DevSleep (Device Sleep) mode


Ordering Information

| | |
|-------|----------------|
| 64GB | TS64GMTS952T2 |
| 128GB | TS128GMTS952T2 |
| 256GB | TS256GMTS952T2 |
| 512GB | TS512GMTS952T2 |
| 1TB | TS1TMTS952T2 |
| 2TB | TS2TMTS952T2 |

Specifications

| | | |
|------------------------------|---|---|
| Appearance | Dimensions | 80.0 mm x 22.0 mm x 3.58 mm (3.15" x 0.87" x 0.14") |
| | Weight | 9 g (0.32 oz) |
| | M.2 Type | 2280-D2-B-M (Double-sided) |
| | Form Factor | M.2 2280 |
| Interface | Bus Interface | SATA III 6Gb/s |
| Storage | Capacity | 64 GB / 128 GB / 256 GB / 512 GB / 1 TB / 2 TB |
| | Flash Type | 3D NAND flash |
| Operating Environment | Operating Voltage | 3.3V±5% |
| | Operating Temperature | Extended Temp. -20°C (-4°F) ~ 75°C (167°F) |
| | Storage Temperature | -55°C (-67°F) ~ 85°C (185°F) |
| | Humidity | 5% ~ 95% |
| | Shock | 1500 G, 0.5 ms, 3 axis |
| | Vibration (Operating) | 20 G (peak-to-peak), 7 Hz ~ 2,000 Hz (frequency) |
| Power | Power Consumption (Operation) | 2.1 watt(s) |
| | Power Consumption (IDLE) | 0.4 watt(s) |
| Performance | Sequential Read/Write (CrystalDiskMark) | Read: Up to 560 MB/s Write: Up to 520 MB/s |
| | 4K Random Read/Write (IOmeter) | Read: Up to 95,000 IOPS Write: Up to 85,000 IOPS |
| | Mean Time Between Failures (MTBF) | 3,000,000 hour(s) |
| | Terabytes Written (TBW) | Up to 3,520 TBW |
| | Drive Writes Per Day (DWPD) | 1.61 (3 yrs) |
| Warranty | Certificate | CE / FCC / BSMI |
| | Warranty | Three-year Limited Warranty |

Mechanical Dimensions

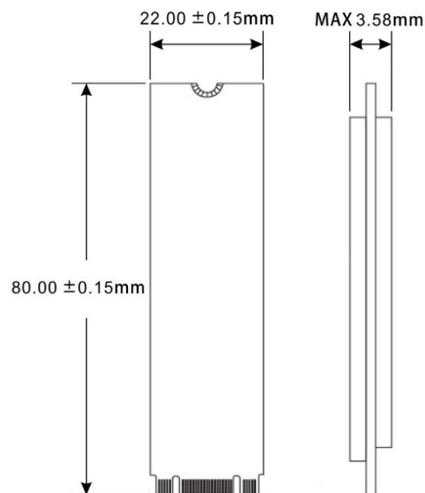

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.