



PCIe M.2 SSDs

PCIe SSD 260S

Transcend's PCIe Gen5 SSD MTE260S is built for next-generation speed and reliability, featuring the latest PCI Express® Gen5 x4 interface, advanced 3D NAND flash, and DDR4 DRAM cache. Powered by a low-power controller and enhanced with a graphene heatsink, it delivers exceptional speed, stability, and efficiency. Whether you're immersed in AAA gaming, handling 4K/8K video production, or running demanding AI applications, the MTE260S ensures ultra-fast loading and instant responsiveness—unlocking the full potential of your system.



Next-Level Speed Starts Here.


Transcend's PCIe SSD MTE260S complies with the NVMe 2.0 standard, supporting the PCIe™ Gen5 x4 interface, delivering sequential R/W speeds to 14,000/11,000 MB/s, and random speeds to 1,400K IOPS, providing captivating performance and response times for high-end gaming computers and AI-powered systems.

Note: Performance is based on CrystalDiskMark v6.0.2.



PCIe 5.0: Beyond Fast.

Transcend's MTE260S features the new PCIe 5.0 specification, supporting a bandwidth of 32 GT/s per lane. Backwards compatible with PCIe 4.0, PCIe 5.0 unleashes higher transfer speeds and guarantees lower system latency. For advanced gamers, this means a more seamless and immersive experience.

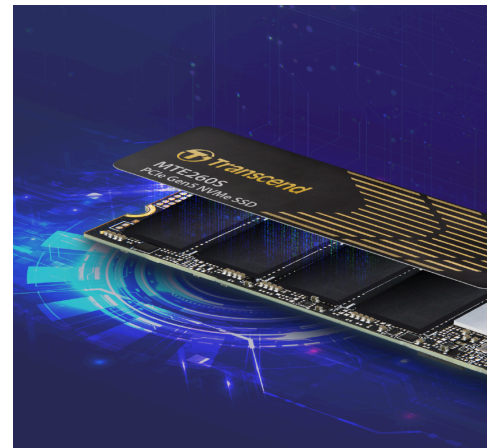

Cool Speed. Low Power.

The Transcend PCIe SSD MTE260S features a cutting-edge 6nm low-power controller that ensures long-lasting power efficiency and reduced heat generation. Combined with an integrated graphene heatsink, it enhances thermal dissipation to maintain stable, high-speed performance. Whether you're binge-watching, editing videos, or diving into AAA gaming titles, the MTE260S stays cool and efficient—no thermal throttling, no power spikes, just seamless performance.



PCIe M.2 SSDs

PCIe SSD 260S

Features

- Space-saving M.2 Type 2280 form factor
- Graphene heatsink and dynamic thermal throttling mechanism for higher stability
- ECC (Error Correction Code) function and wear-leveling algorithm ensure reliable data transfers



SSD Scope

SSD Scope features useful functions to maintain your SSD in a healthy status and also copy data from your original HDD to Transcend's new SSD.

Specifications

Appearance

Type	M.2 2280
Dimensions	80 mm x 22 mm x 3.77 mm (3.15" x 0.87" x 0.15")
Weight	10 g (0.35 oz)

Interface

Bus Interface	NVMe PCIe Gen5 x4
---------------	-------------------

Storage

Flash Type	3D NAND flash
Capacity	2 TB

Operating Environment

Operating Temperature	0°C (32°F) ~ 70°C (158°F)
Operating Voltage	3.3V±5%

Performance

Sequential Read/Write (CrystalDiskMark)	Read: Up to 14,000 MB/s Write: Up to 11,000 MB/s
4K Random Read/Write (IOmeter)	Read: Up to 1,400,000 IOPS Write: Up to 1,100,000 IOPS
Mean Time Between Failures (MTBF)	2,000,000 hour(s)
Drive Writes Per Day (DWPD)	0.411 (5 yrs)
Terabytes Written (TBW)	Up to 1,500 TBW

Warranty

Certificate	CE / UKCA / FCC / BSMI / KC / RCM
Warranty	Five-year Limited Warranty

Ordering Information

2TB	TS2TMTE260S
-----	-------------

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment.