


Embedded Solutions

GMSL2 Interface

ECM400G2F



Transcend's industrial embedded camera module ECM400G2F features a Sony high-sensitivity CMOS sensor with advanced STARVIS™ imaging technology, delivering 8MP high-resolution imaging and a 140° wide field of view. With near-infrared (NIR) enhancement, the module captures detailed, low-noise images even in low-light environments.

The ECM400G2F adopts a GMSL2 high-speed transmission interface and a Fakra industrial-grade connector, supporting up to 6Gbps bandwidth and coaxial cable transmission distances of up to 15 meters. With integrated Power over Coax (PoC), the module enables video, control, and power delivery through a single coaxial cable, significantly simplifying system cabling and enhancing overall system reliability.

Supporting real-time video output up to 60 fps and remote control via I²C, the ECM400G2F operates reliably within an industrial temperature range of -30°C to 70°C, suited for applications such as autonomous driving systems, robotic vision, smart factories, and industrial automation equipment (AMR/AMV).

Hardware Features

- GMSL2 high-speed video transmission interface for long-distance image output
- NIR (Near-Infrared) enhancement improves sensitivity to near-infrared light, allowing the camera to deliver clear and detailed images in low-light or IR-assisted night-time conditions.
- An integrated HDR (High Dynamic Range) function ensures clear and well-balanced images even in scenes with extreme contrast.
- 4K high resolution captures images with outstanding clarity and fine detail.

Firmware Features

- Customize image parameters in the driver to ensure image quality meets customer requirements.
- Provide ISP (Image Signal Processor) tools, allowing customers to fine-tune image parameters themselves and achieve optimal results in various shooting environments.


Ordering Information

0GB	TS-ECM400G2F
-----	--------------

Specifications

Appearance	Dimensions	38 mm x 38 mm x 39.78 mm (1.5" x 1.5" x 1.57")
Interface	Bus Interface	GMSL2
Camera	CMOS Sensor	Sony IMX415
	Active Pixel	3864 (H) x 2176 (V) = 8 MP
	Pixel Size	1.45μm x 1.45μm
	Lens Field of View	140°/121°/68°
	Illumination Type	Back Side Illumination(BSI)
	ADC Resolution	12/10-bit ADC
	Optical Format	1/2.8"
	Shutter Type	Rolling Shutter
	Chromaticity	Color
	Maximum Frame Rate	Full size @ 60 fps
Power	Operating Voltage	12V
	Power Consumption (Operation)	1.4 watt(s)
Operating Environment	Operating Temperature	-30°C (-22°F) ~ 70°C (158°F)
	Storage Temperature	-40°C (-40°F) ~ 85°C (185°F)
	Humidity	5% ~ 95%
Warranty	Warranty	Three-year Limited Warranty

Mechanical Dimensions

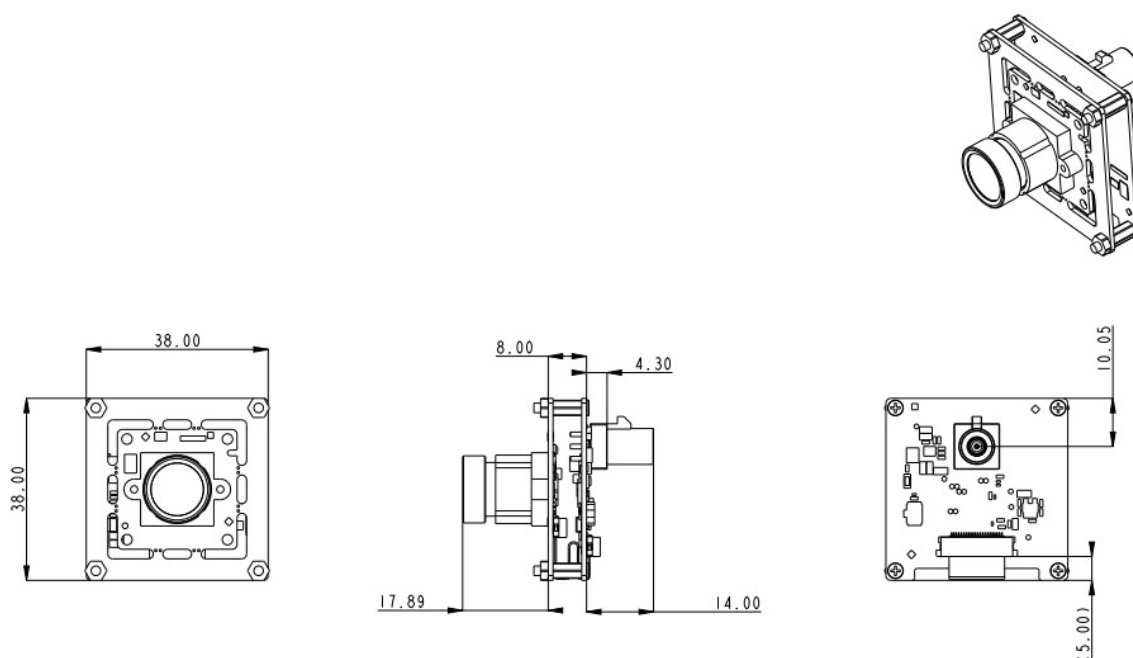

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.