

SATA III M.2 SSDs

MTS980P

Transcend's MTS980P industrial-grade SATA III M.2 2280 DRAM-less solid-state drive features BiCS8 218-layer 3D NAND flash and power loss protection (PLP) technology to help maintain data integrity during unexpected power loss. Its DRAM-less architecture helps reduce power consumption and system costs, making it suitable for embedded systems and industrial equipment.

The MTS980P supports a wide operating temperature range of -40°C to 85°C and undergoes rigorous in-house testing to ensure reliable operation in demanding industrial environments.

Hardware Features

- Compliant with RoHS 2.0 standards
- Endurance: 3K P/E cycles (Program/Erase cycles) guaranteed
- Space-saving M.2 form factor (80mm) – ideal for mobile computing devices
- Power Loss Protection (PLP) to prevent data loss in the event of sudden power outage
- Promised operational reliability in a wide temperature range (from -40°C to 85°C)

Ordering Information

128GB	TS128GMTS980P
256GB	TS256GMTS980P
512GB	TS512GMTS980P
1TB	TS1TMTS980P
2TB	TS2TMTS980P

Firmware Features


- Built-in LDPC ECC (Error Correction Code) functionality
- Advanced Global Wear-Leveling and Block management for reliability
- Advanced Garbage Collection
- Supports S.M.A.R.T. function to conduct health monitoring, analysis, and reporting for storage devices
- TRIM command for better performance

© Transcend Information, Inc. All Rights Reserved.

Specifications

Appearance	Dimensions	80 mm x 22 mm x 3.88 mm (3.15" x 0.87" x 0.15")
	Weight	8 g (0.28 oz)
	M.2 Type	2280-D5-B-M (Double-sided)
	Form Factor	M.2 2280
Interface	Bus Interface	SATA III 6Gb/s
Storage	Capacity	128 GB / 256 GB / 512 GB / 1 TB / 2 TB
	Flash Type	218-layer 3D NAND flash
Operating Environment	Operating Voltage	3.3V±5%
	Operating Temperature	Wide Temp. -40°C (-40°F) ~ 85°C (185°F)
	Storage Temperature	-55°C (-67°F) ~ 85°C (185°F)
	Humidity	5% ~ 95%
	Shock	1500 G, 0.5 ms, 3 axis
	Vibration (Operating)	20 G (peak-to-peak), 7 Hz ~ 2,000 Hz (frequency)
Power	Power Consumption (Operation)	0.73 watt(s)
	Power Consumption (IDLE)	0.24 watt(s)
Performance	Sequential Read/Write (CrystalDiskMark)	Read: Up to 560 MB/s Write: Up to 515 MB/s
	4K Random Read/Write (IOmeter)	Read: Up to 70,000 IOPS Write: Up to 85,000 IOPS
	Mean Time Between Failures (MTBF)	3,000,000 hour(s)
	Terabytes Written (TBW)	Up to 1,350 TBW
	Drive Writes Per Day (DWPD)	2.4 (3 yrs)
Warranty	Certificate	CE / UKCA / FCC / BSMI
	Warranty	Three-year Limited Warranty

Mechanical Dimensions

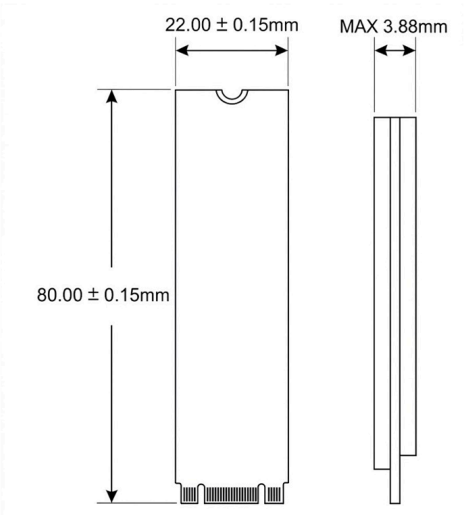

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.

© Transcend Information, Inc. All Rights Reserved.