



## Docking Station TS-DPD6N

Designed exclusively for Transcend's DrivePro Body 30 and DrivePro Body 60 body cameras, Transcend's TS-DPD6N docking station offers a complete camera charging and data upload solution. The six-port docking station is network-based, providing two Ethernet ports for scalability and fast deployment. A LAN port is used for administrative setup, whereas a WAN port is for data upload to a designated folder while charging. A USB 3.1 Gen 1 port is also included for storing video recordings and snapshots to external storage devices.




### Made for Transcend's DrivePro Body cameras

Designed exclusively for the DrivePro Body 30 and DrivePro Body 60, Transcend's TS-DPD6N docking station offers a complete camera charging and data upload solution.



### Multifunctional docking station

The networked docking station features both a LAN port for administrative setup and a WAN port for simultaneous upload of data to a designated folder. A USB port is also included for exporting videos and snapshots to external storage devices.

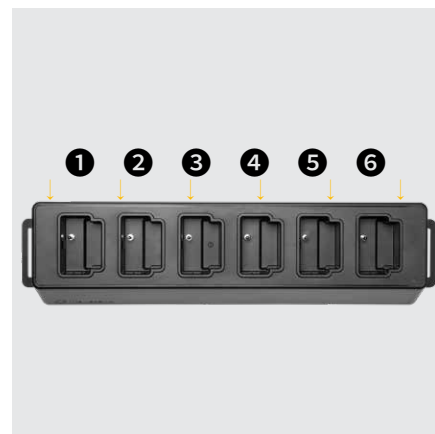

### Charge and upload at once

The station's six charging ports make for supreme efficiency. They can all be used simultaneously, and users can charge devices even while uploading data.



## Docking Station TS-DPD6N

### Features

- For Transcend's DrivePro Body 30 & 60 cameras
- A complete camera charging and data upload solution
- Six charging ports for supreme efficiency
- Upload data simultaneously
- Auto backup and unlock

### Specifications

#### Appearance

Dimensions	423 mm x 105 mm x 54 mm (16.65" x 4.13" x 2.13")
------------	--

Weight	980 g (34.57 oz)
--------	------------------

#### Interface

USB Type	USB Type-A
----------	------------

Connection Interface	USB 3.1 Gen 1
----------------------	---------------

#### Hardware

Network Port	WAN: 10/100/1000 Mbps Ethernet
--------------	--------------------------------

	LAN: 10/100 Mbps Ethernet
--	---------------------------

#### Power

Power Supply (Max.)	12V / 3A
---------------------	----------

#### Operating Environment

Operating Temperature	0°C (32°F) ~ 40°C (104°F)
-----------------------	---------------------------

Storage Temperature	-20°C (-4°F) ~ 70°C (158°F)
---------------------	-----------------------------

#### Warranty

Certificate	CE / FCC / BSMI / KC / EAC / RCM
-------------	----------------------------------

Warranty	Two-year Limited Warranty
----------	---------------------------

### Ordering Information

TS-DPD6N	For DrivePro Body 30 and DrivePro Body 60
----------	---